


Silage Shear Grab

Serrated front edge allows for precise cutting and retains sharpness.

Rounded grab profile cuts smoothly through silage stacks with maximum efficiency.

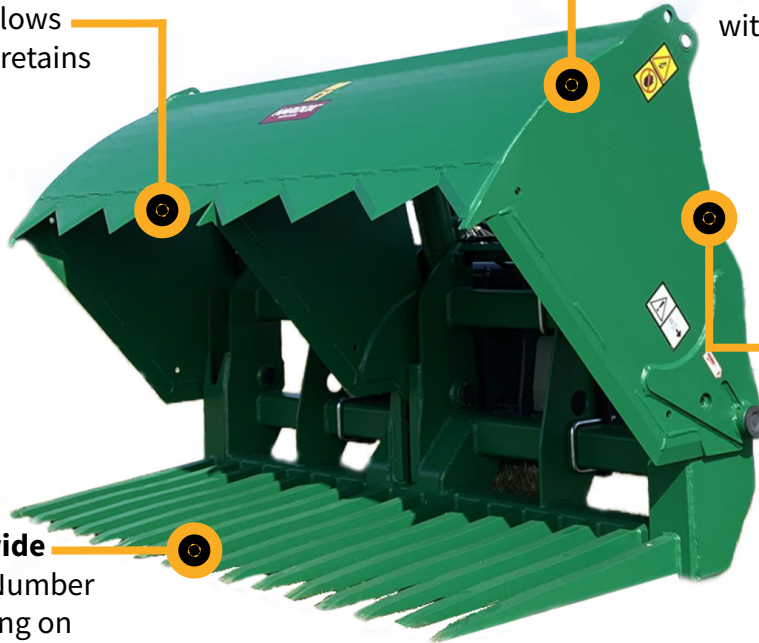

High capacity hydraulic cylinders provide substantial grab force to cut through the densest of silage.

Comes with **40mm wide Hardox base tines**. Number of tines vary depending on the size.

Fast Facts

- + 24 Months Manufacturers Warranty
- + Ideal attachment for cutting silage from silage pits
- + Customisable to exact specifications

About

- + The Silage Shear Grab cuts silage blocks from silage pits, leaving a clean, sealed face to prevent spoilage due to secondary fermentation and oxidation of the clamp face.
- + Designed to maximise visibility from the cab for increased safety.
- + Suited to all Telehandler and Ag loader models.
- + Available in a range of widths from 1.3m - 2.2m with capacities ranging from 0.70m³ - 1.15m³.
- + Quick hitch compatible.

Kerfab's range of Silage Shear Grabs are available in a range of widths, capacities and machine sizes. Below is a list of our most popular sizes. **Custom Solutions Available**

Product Specs

| Part Number | Width mm | Weight kg | Tines Bottom | Capacity m ³ |
|-------------|----------|-----------|--------------|-------------------------|
| SSG13 | 1300 | 400 | 10 | 0.70 |
| SSG16 | 1600 | 455 | 12 | 0.85 |
| SSG19 | 1900 | 660 | 14 | 1.00 |
| SSG22 | 2200 | 715 | 16 | 1.15 |